


TABLE 1	
MODEL NUMBER	LENGTH
415-0509-MM100	100mm ±6
415-0509-MM200	200mm ±6
415-0509-MM250	250mm ±6
415-0509-MM500	500mm ±6
415-0509-M1.0	1000mm ±12

REV	ECO	DATE
1	INITIAL RELEASE	04/24/2023
2	EC-2312006	12/12/2023
3	EC-2408008	08/15/2024

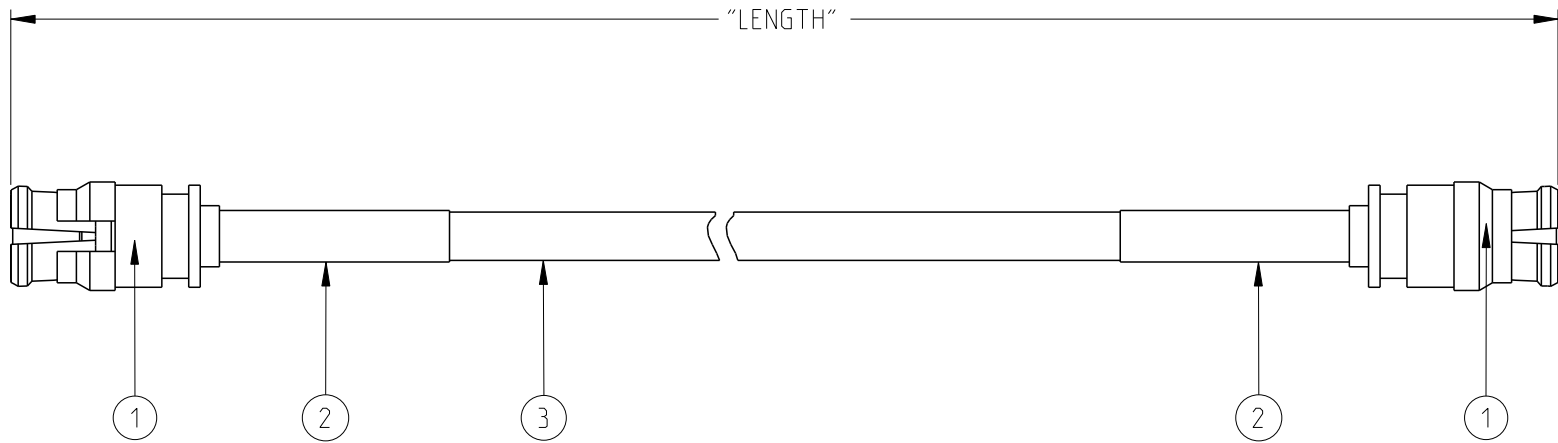

PART LIST		
ITEM	QTY	DESCRIPTION
1	2	SMP FEMALE
2	2 X .40±.10	HEAT SHRINK TUBING
3	AR	CABLE

NOTES: UNLESS OTHERWISE SPECIFIED.

- CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
- CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
- ASSEMBLIES TO BE PACKAGED 1 PER BAG.
- VSWR: 1.50 MAX DC-18GHz

<p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018</p>	<p>Model No: 415-0509-MXXXX</p>	<p>JOHNSON</p>		
	<p>RoHS <input checked="" type="checkbox"/> (EU)/2015/863 COMPLIANT</p>	<p>Cage Code 34078</p>	<p>Title: CABLE ASSY, METRIC, STR SMP FEMALE TO STR SMP FEMALE, .047" FLEXIBLE</p>	
	<p>UNLESS OTHERWISE SPECIFIED UNITS: INCH</p> <p>.XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°</p>	<p>3RD ANGLE PROJECTION</p> <p>Drawn by: JIMMY CHEN</p>	<p>Drawing No. 415-0509-MXXXX</p>	<p>REV. 3</p>
	<p>Date: 04/24/2023</p>	<p>Size A DO NOT SCALE Workmanship Std: NONE 1 OF 1</p>		