
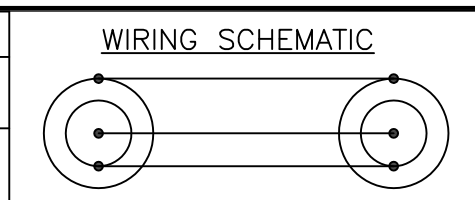
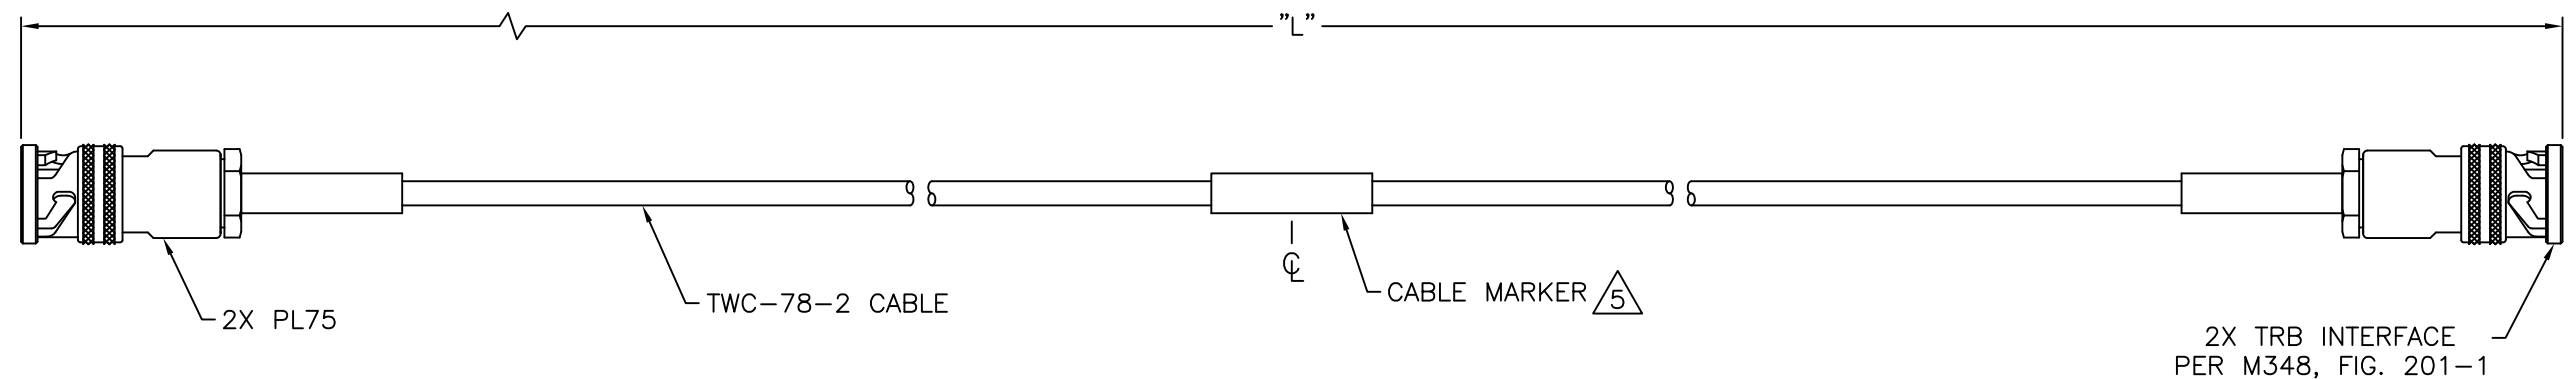


TABLE 1		
MODEL NUMBER	"L"	MARKER 
1-21-M1.0	1.0 M	21-21-M1.0 14949 #####
1-21-M1.5	1.5 M	21-21-M1.5 14949 #####
1-21-M2.0	2.0 M	21-21-2.0 14949 #####
1-21-M2.5	2.5 M	21-21-2.5 14949 #####
1-21-M3.0	3.0 M	21-21-M3.0 14949 #####
1-21-M3.5	3.5 M	21-21-3.5 14949 #####
1-21-M4.0	4.0 M	21-21-M4.0 14949 #####
1-21-M4.5	4.5 M	21-21-M4.5 14949 #####
1-21-M5.0	5.0 M	21-21-M5.0 14949 #####



REV	ECO	DATE
001	57751	10/16/2020




NOTES: UNLESS OTHERWISE SPECIFIED.



1. WORKMANSHIP PER IPC/WHMA-A-620, CLASS 3, SECTION 13.

 TOLERANCE PER IPC/WHMA-A-620, SECTION 11.1

3. TESTING:
3.1 CONTINUITY
3.2 DWV: 1000 VRMS

4. BEND RADIUS (MIN): 33 MM

 MARKERS:
5.1 MARKER PER TABLE 1.
5.2 ##### = LOT CODE

 <small>NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.</small> <small>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018</small>	Model No.	21-21-MX.X	Title: TROMPETER	
	RoHS2	14949	CABLE ASSEMBLY, METRIC, TRB PLUG TO TRB PLUG	
	2011/65/EU	3RD ANGLE PROJECTION	Drawing No.	Rev.
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	 2 10/15/2020	C. MONAHAN	C_21-21-MX.X
	SIZE	DO NOT SCALE DRAWING	Workmanship Std.	SHEET
	B	SEE NOTES		1 OF 1