



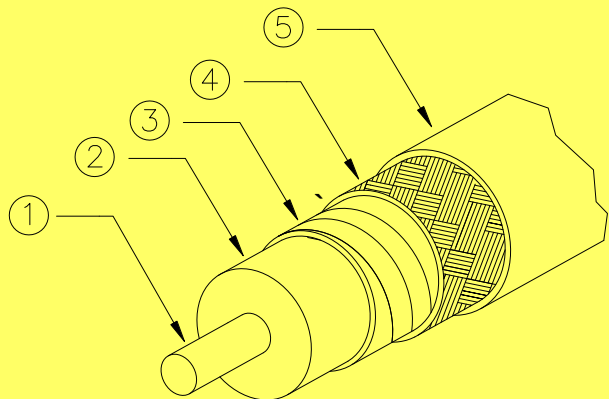

Part	Description	Diameter
1 – Center Conductor	Silver Plated Copper- Solid	0.055" +/- 0.001
2 – Dielectric	Extruded PTFE Core	0.147" (nominal)
3 – Outer Conductor	Helically Wrap Silver Plated Copper Flat Braid	0.158" (nominal)
4 – Shield	Silver Plated Round Braid	0.174" (nominal)
5 – Jacket	Extruded FEP	0.189" +/- 0.005

VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	84% Nominal
Delay	1.20 ns/ft
Capacitance	23.8 pF/ft
Maximum Frequency	28Ghz

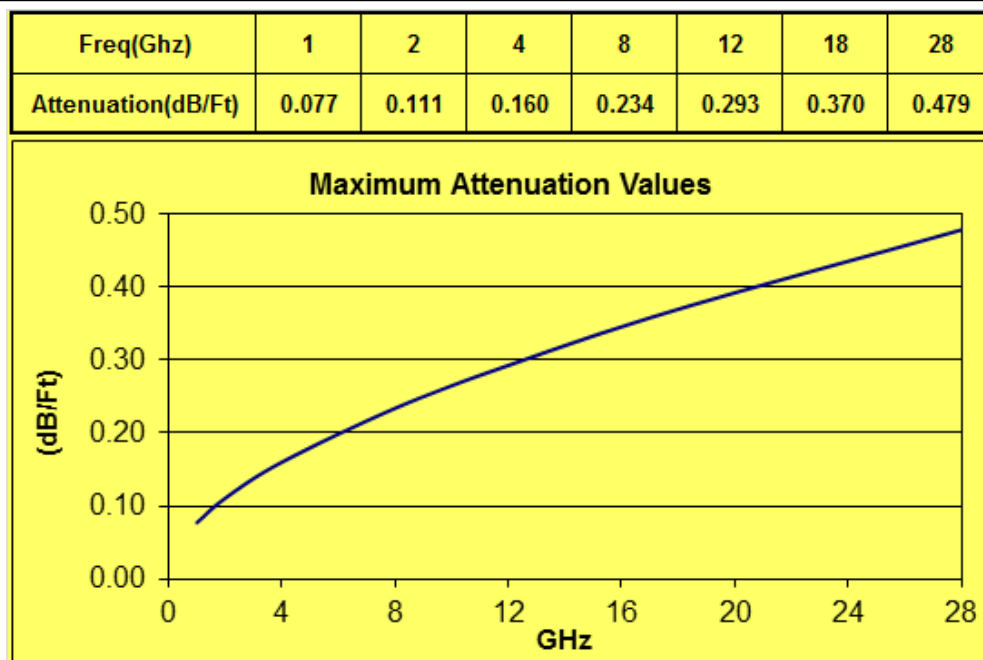

CABLE OVERVIEW



DATE
8/24/18

DRAWN BY

REVISED

PRODUCT LINE

SEMFLEX

DESCRIPTION

LA190S Cable, 25ft length

SIZE

RoHS

A

COMPLIANT

DOCUMENT

88315-L25

Form#

1327 Rev. 1

SHEET