



Part	Description	Diameter
1 – Center Conductor	Silver Plated Copper- Solid	0.025" +/- 0.001
2 – Dielectric	PTFE Tape	0.074" (nominal)
3 – Outer Conductor	Silver Plated Copper Flat Braid	0.080" (nominal)
4 – Shield	Silver Plated Copper Round Braid	0.096" (nominal)
5 – Jacket	Extruded FEP	0.118+/- .003"

VSWR	1.20 : 1
Impedance	50 +/- 2 ohms
Velocity of Propagation	75% Nominal
Delay	1.34 ns/ft
Capacitance	26.7 pF
Maximum Frequency	18Ghz

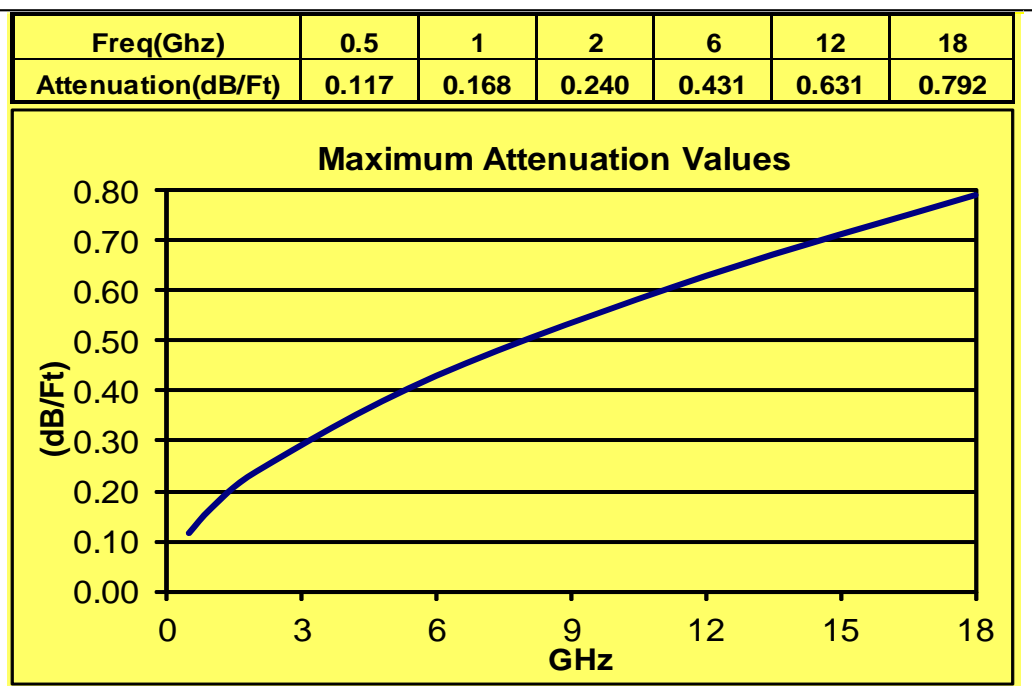

CABLE OVERVIEW

	PRODUCT LINE		SEMIFLEX	
	DESCRIPTION			
DATE		8/24/18		
DRAWN BY				
REVISED				
SIZE	RoHS	DOCUMENT		
A	COMPLIANT	FSW110-EF-L25		
Form#	1327 Rev. 1			SHEET