



MODEL NUMBER	"A"	Ø"B"
5-0032-1	.24	.063
5-0032-2	.34	.070

REV	ECO	DATE
—	—	—
001	57533	6/15/2020

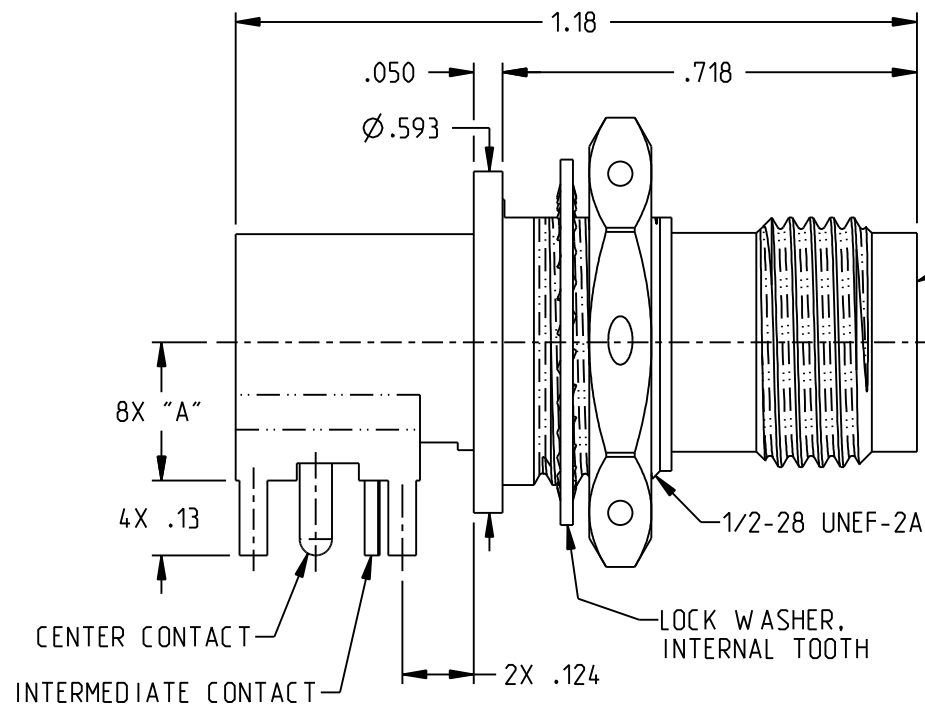

11/16 HEX NUT w/3X Ø.042
SAFETY WIRE HOLES

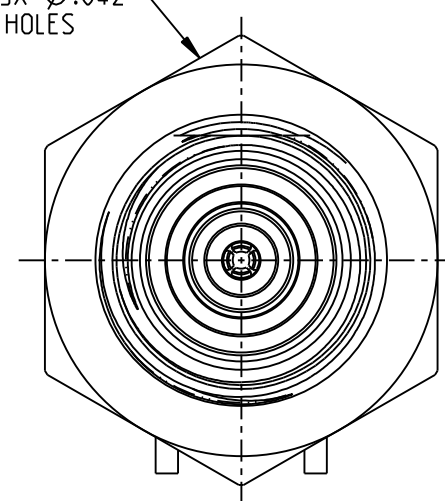

5-0032-1 SHOWN

NOTES: UNLESS OTHERWISE SPECIFIED.

1. MATERIAL & FINISH:

- 1.1 BODY & INTERMEDIATE CONTACT:
GOLD PLATED BRASS
- 1.2 INSULATOR & DIELECTRIC:
PTFE (TEFLON)
- 1.3 CENTER CONTACT: GOLD PLATED
BERYLLIUM COPPER
- 1.4 MOUNTING HARDWARE: GOLD
PLATED COPPER ALLOY



2. ELECTRICAL:

- 2.1 FREQUENCY (MAX): 500 MHZ
- 2.2 IMPEDANCE: NON-CONSTANT


3. PANEL THICKNESS (MAX): .125

4. PANEL NUT TORQUE (MAX): 35 INCH POUNDS.

5. TESTED PER TT-09, I.A.W. TCS-70.

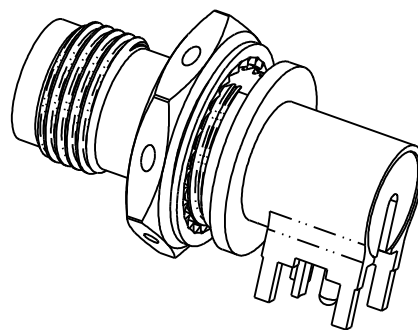

RECOMMENDED
PANEL CUTOUT

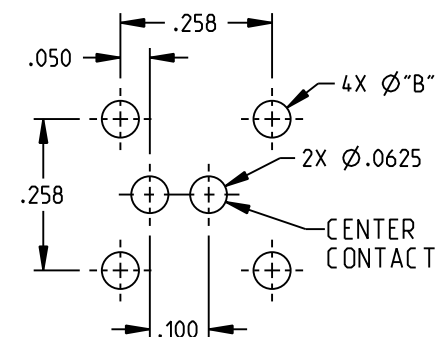

RECOMMENDED MTG
HOLE PATTERN

NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018	Model No:	5-0032-X	TROMPETER	
	RoHS2	2015/863/EU	Title: TRT JACK, RIGHT ANGLE CIRCUIT BOARD BULKHEAD MT	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	14949	Drawing No. 5-0032	
	ENGINEER: C. MONAHAN	3RD ANGLE PROJECTION	REV. 001	
Date: 6/16/2020		Size: A	DO NOT SCALE DRAWING	1 OF 1