MODEL NO.	PACKAGING
147-0801-611	ONE PCS PER BAG

REV	ECO	DATE
001	ECO-17-0032	11/28/2017
002	ECO-18-0020	08/21/2018

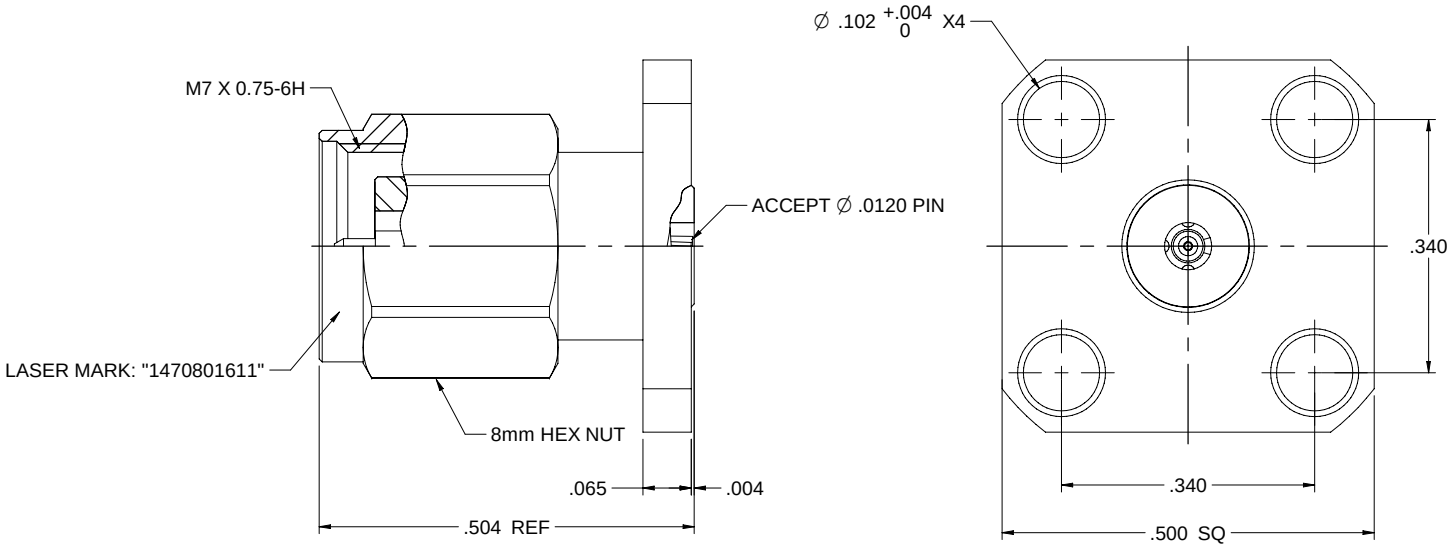

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL & FINISH:
   1.1 BODY & SHELL: PASSIVATED STAINLESS STEEL
   1.2 CONTACT PIN : GOLD PLATED BERYLLIUM COPPER
   1.3 INSULATOR: ULTEM 1000 AMBER
   1.4 C RING: BERYLLIUM COPPER
   1.5 LOCK RING: GOLD PLATED BRASS
   1.6 GASKET: SILICONE RED

2. ELECTRICAL:
   2.1 IMPEDANCE: 50 OHMS
   2.2 FREQUENCY RANGE: DC-50 GHz
   2.3 VOLTAGE STANDING WAVE RATIO: 1.2 MAX
   2.4 CONTACT RESISTANCE:
      2.4.1 CENTER CONTACT: 4 MILLIOHM MAX
      2.4.2 OUTER CONTACT: 2.5 MILLIOHM MAX
   2.5 INSULATION RESISTANCE: 5000 MOHM MIN
   2.6 DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS MIN

3. MECHANICAL:
   3.1 ENGAGEMENT/ DISENGAGEMENT FORCE: 0.23 NM MAX
   3.2 COUPLING NUT RETENTION: 267 N MIN
   3.3 COUPLING PROOF TORQUE: 1.65 NM
   3.4 CONTACT RETENTION: 20 N MIN
   3.5 DURABILITY: 500 CYCLES MIN

4. ENVIRONMENT:
   4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B.
   4.2 OPERATING TEMPERATURE: -65 TO 165°C
   4.3 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
   4.4 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
   4.5 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

cinch connectivity solutions
This PROPRIETARY Document is property of Cinch Connectivity Solutions. It contains information and data which are proprietary to Cinch Connectivity Solutions, and may not be reproduced, disclosed, or used in whole or in part without express written permission and in accordance with applicable agreements.
INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.

Model No. 147-0801-611
RoHS2 ☑ 2011/65/EU
Cage Code
UNLESS OTHERWISE SPECIFIED (INTL SI)
3RD ANGLE PROJECTION
.XXX ±.02
.XXX ±.01
ANGLES ±5°
Drawn by: Betty.Yu
Date: 08/21/2018

Johnson

Title: PANEL RECEPTACLE PLUG,4 HOLE FLANGE, ACCEPTS 0.305mm PIN ,2.4mm

Drawing No. 147-0801-611 Rev. 002

Size C | DO NOT SCALE DRAWING | Workmanship Std. NONE | Sheet 1 of 1