


REV	ECO	DATE
001	58169	3/2/2022
002	58299	6/6/2022

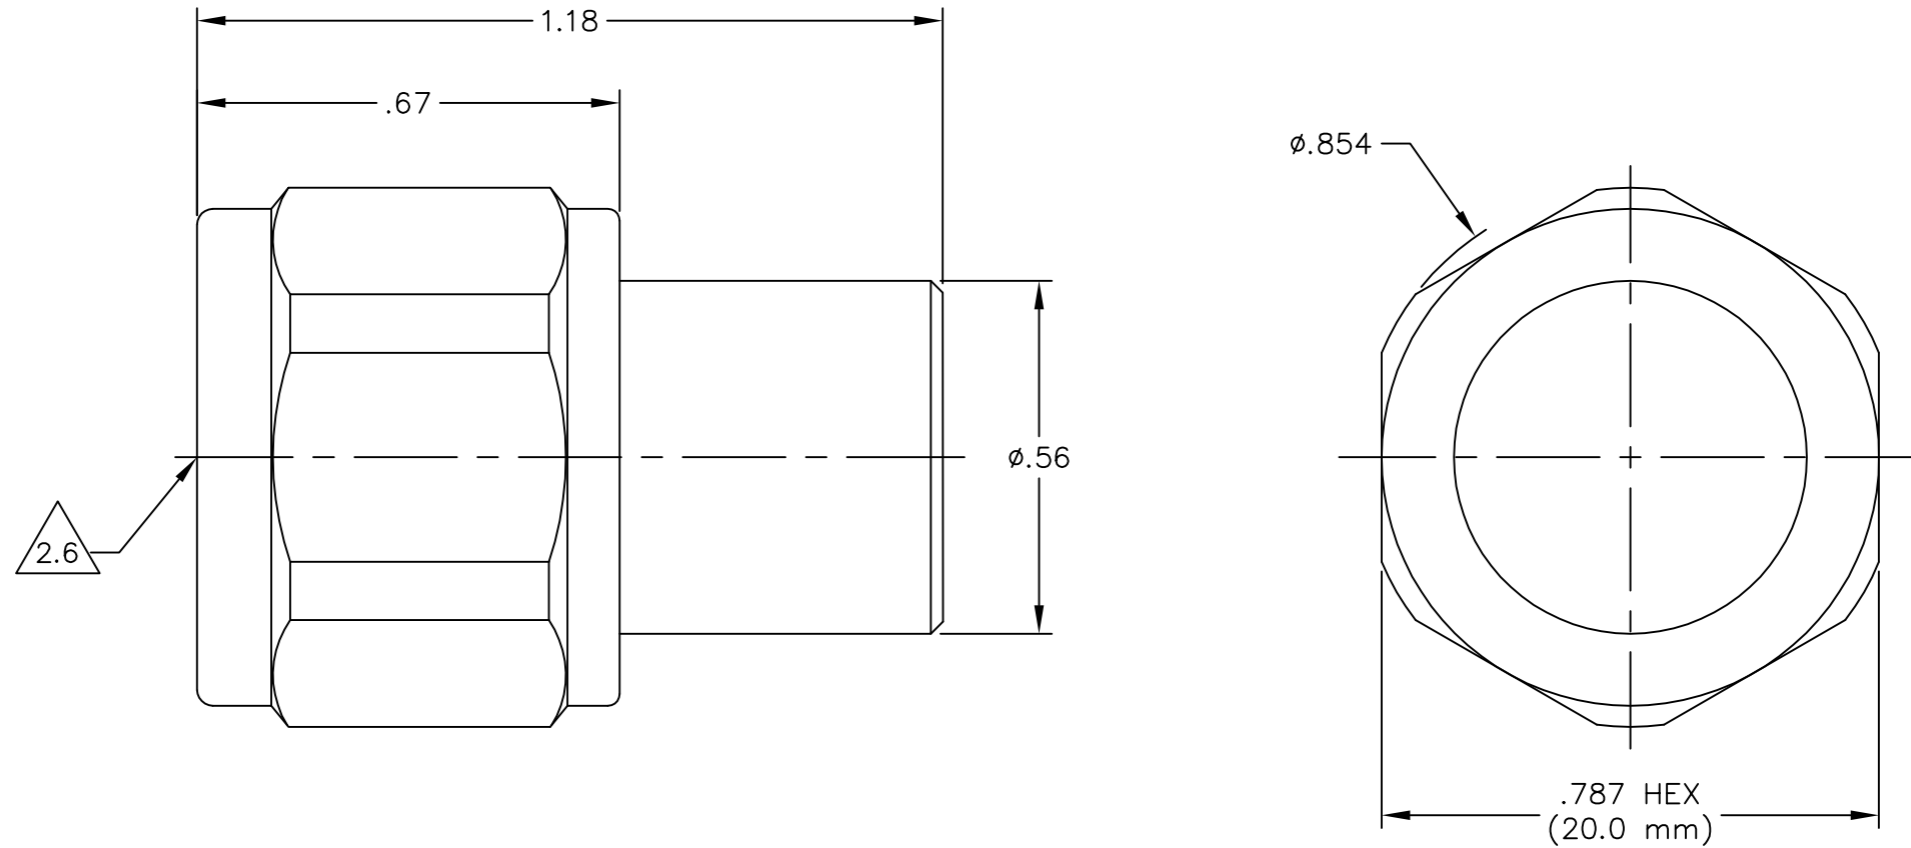

NOTES:

1. MATERIAL & FINISH:
 - 1.1 HOUSING & COUPLING NUT: TRI-ALLOY PLATED BRASS
 - 1.2 CENTER CONTACT: GOLD PLATED BRASS
2. SPECIFICATIONS:
 - 2.1 FREQUENCY RANGE: DC TO 18 GHz
 - 2.2 IMPEDANCE: 50 OHMS NOMINAL
 - 2.3 VSWR (MAX): 1.18:1
 - 2.4 INPUT POWER (MAX): 2 WATTS AT +25°C, DERATED LINEARLY TO 0.5 WATTS AT 85°C
 - 2.5 OPERATING TEMP. RANGE: -65°C TO +85°C

2.6 INTERFACE AND COUPLING NUT THREADS MEET REQUIREMENTS OF MIL-STD-348, FIGURE 304-1

<p>NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018</p>	Model No. CGT-1180-M0-NNN-34	Title: MIDWEST MICROWAVE TYPE N TERMINATION 2 WATTS, DC-18 GHz		
	RoHS2 <input checked="" type="checkbox"/> 2015/863/EU	Cage Code 34078	Drawing No. CGT-1180-M0-NNN-34-01	Rev. 002
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	3RD ANGLE PROJECTION 	Engineer: J. KEREKES	Workmanship Std:
	.XX ± .02 .XXX ± .005 ANGLES ± 2°	Date: 2/24/22	SIZE A	DO NOT SCALE DRAWING
		SHEET 1 OF 1		