


REV	ECO	DATE
001	58760	08/23/2023

N TYPE MALE
PER MIL-STD-348
FIGURE 304-1

.787 HEX

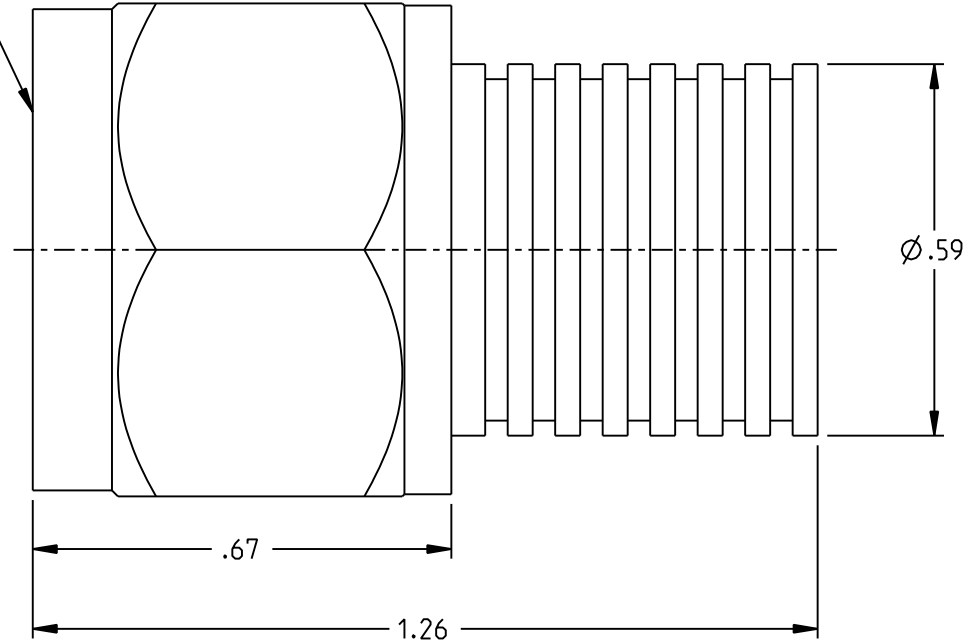

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS & FINISH:

- 1.1 CONNECTOR COUPLING: PASSIVATED STAINLESS STEEL
- 1.2 CONNECTOR BODY & HEAT SINK: TRI-METAL ALLOY PLATED BRASS
- 1.3 CENTER CONTACT: GOLD PLATED BRASS

2. SPECIFICATIONS:

- 2.1 FREQUENCY RANGE: 0-6 GHz
- 2.2 IMPEDANCE: 50 OHMS NOMINAL
- 2.3 POWER RATING: 5 WATTS
- 2.4 VSWR (MAX): 1.15:1
- 2.5 OPERATING TEMPERATURE: -50°C TO 85°C

NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting. INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018	Model No:	CGT-2090-M0-NNN-34		MIDWEST MICROWAVE		
	RoHS	Cage Code	34078		Title:	TYPE N TERMINATION
	UNLESS OTHERWISE SPECIFIED UNITS: INCH	3RD ANGLE PROJECTION			Drawing No.	CGT-2060-M0-NNN-34-01
	ENGINEER: R. BRENDAL	Date:	08/31/2023	Size	A	DO NOT SCALE DRAWING
				Workmanship Std:	Sheet 1 OF 1	